

10.

TRENDSETTER

Collection

AUSTEN

JOYCE & JOYCE LINE

SHAKESPEARE


CARPET TILE




Joyce 3468




Joyce 3469

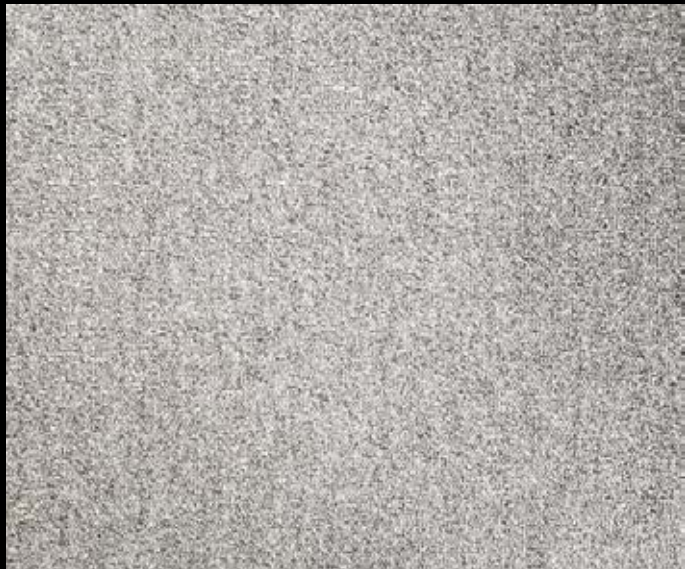

Joyce 3472

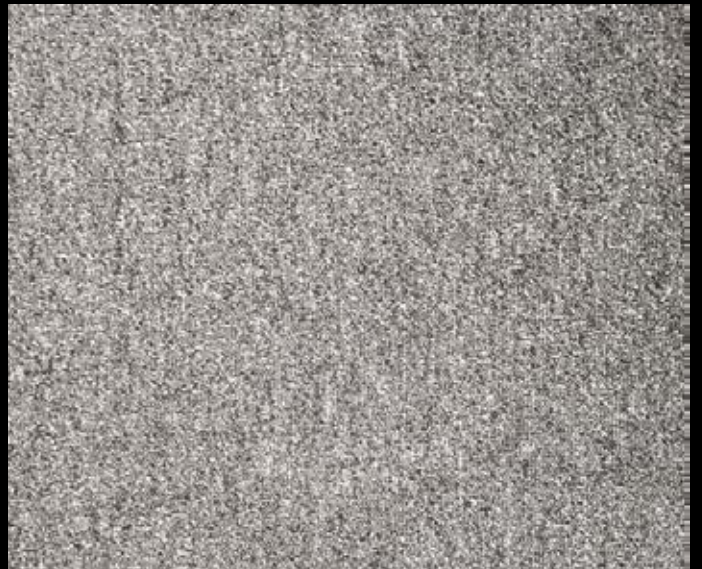

Joyce 3473

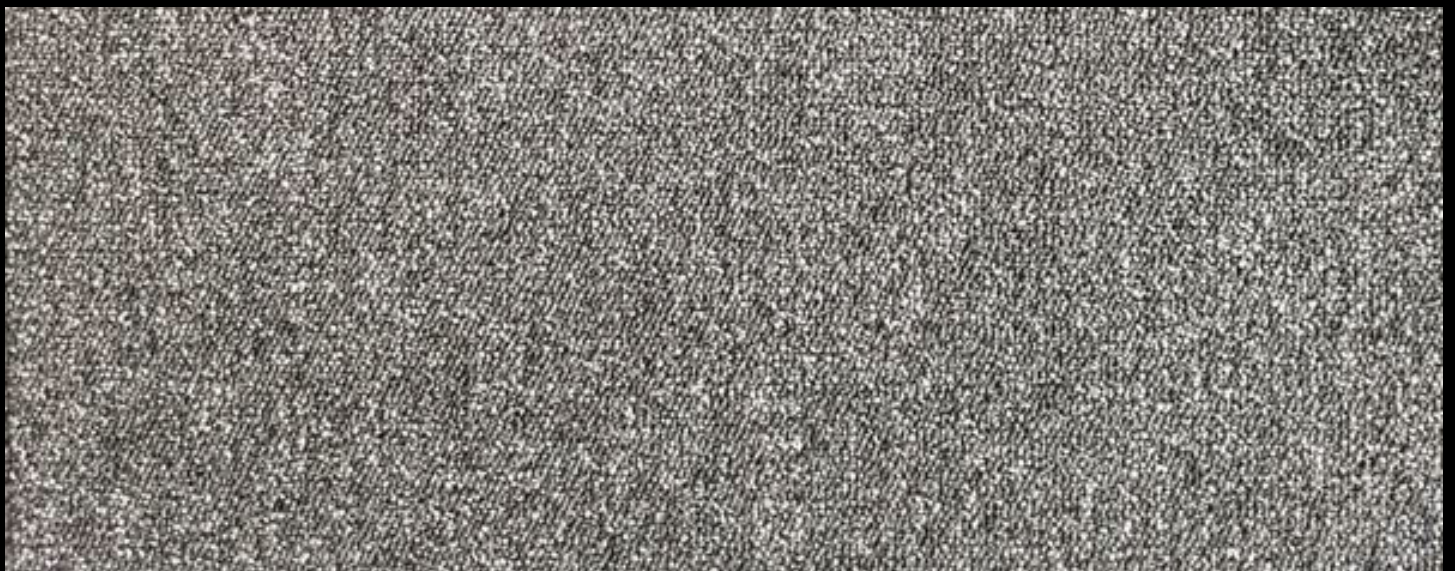

Joyce 3478




Joyce Line **3508**



Joyce Line **3545**




Joyce Line **3578**

Product Type	Tufting
Construction	Loop Pile
Size	50 x 50 cm
Sqm Per Pack	5 m ²
Yarn Type	100 % Polyamide
Dye Method	Solution Dyed
Gauge	1/10
Pile Weight	550 gr/m ²
Total Weight	4000 gr/m ²
Pile Thickness	3.00 mm
Total Thickness	5.00 mm
Backing Foundation	Bithumen
Thermal Isolation ISO 8302	0.08 m ² K/W
Flammability	Bfl-s1
Color Fastness to Water Rubbing	5
Color Fastness to Light	>5
Installation	
Symbols	
CE EN 14041	
Emission	



Shakespeare 90

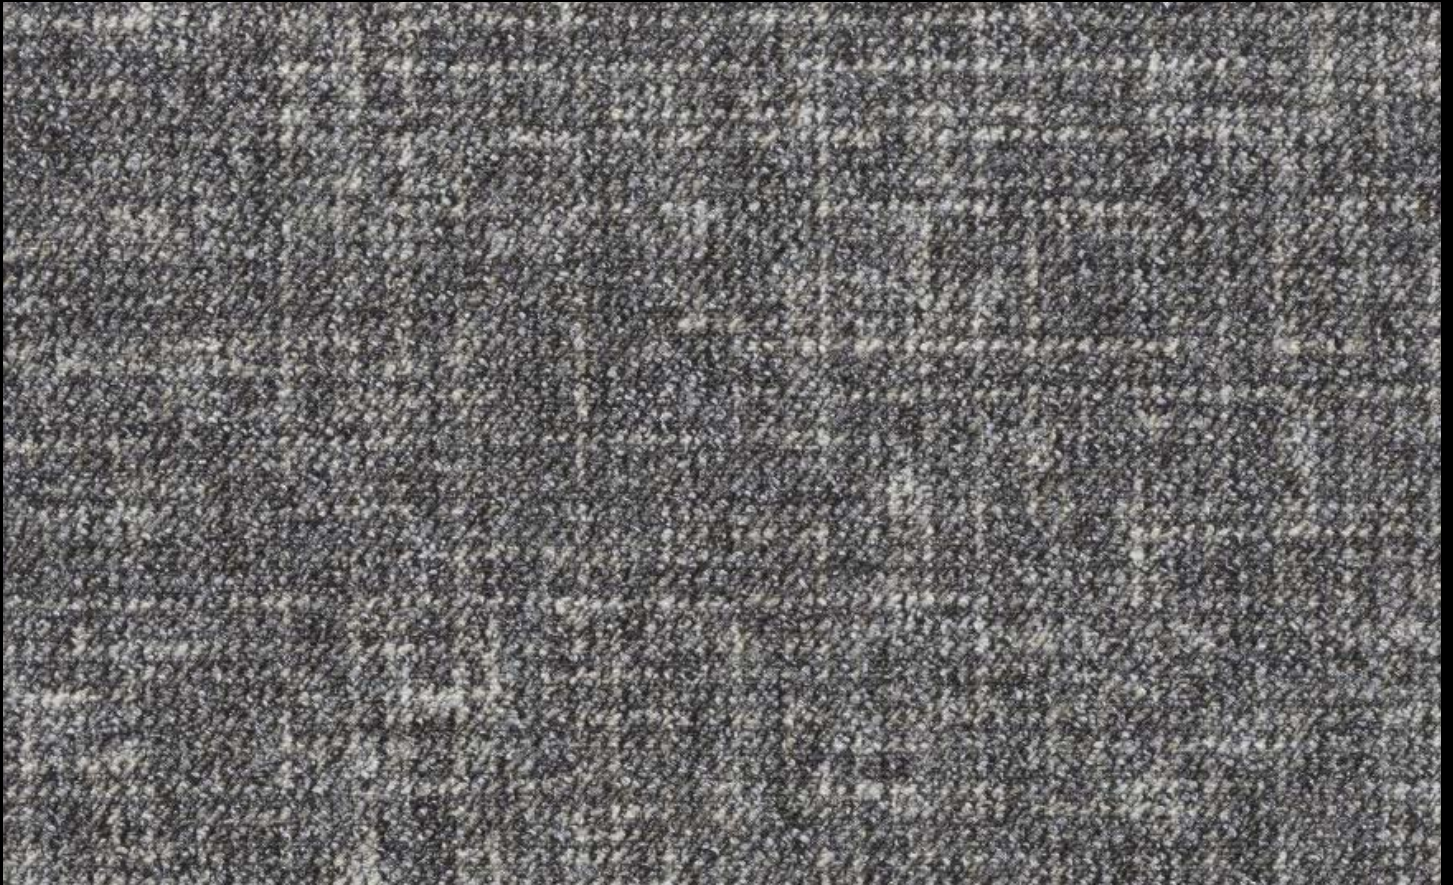

Shakespeare 97



Shakespeare 34




Shakespeare 44



Shakespeare 90



Shakespeare 97

Product Type	Tufting
Construction	Loop Pile
Size	50 x 50 cm
Sqm Per Pack	5 m ²
Yarn Type	60% PA / 40% PP
Dye Method	Solution Dyed
Gauge	1/10
Pile Weight	660 g/m ²
Total Weight	4050g/m ²
Pile Thickness	3.00 mm
Total Thickness	6.00 mm
Backing Foundation	Bithumen
Thermal Isolation ISO 8302	0.066 m ² K/W
Flammability	Bfl-s1
Color Fastness to Water Rubbing	4-5
Color Fastness to Light	5-6
Installation	
Symbols	
CE EN 14041	
Emission	 

AUSTEN



Austen 34



Austen 43



Austen 93



Austen 97



Austen 79



Austen 93



Austen 97

Product Type	Tufting
Construction	Twist Pile Printed
Size	50 x 50 cm
Sqm Per Pack	5 m ²
Yarn Type	100 % Polyamide
Dye Method	Solution Dyed
Gauge	1/10
Pile Weight	800 g/m ²
Total Weight	4200 g/m ²
Pile Thickness	5.00 mm
Total Thickness	6.50 mm
Backing Foundation	Bithumen
Thermal Isolation ISO 8302	0.08 m ² K/W
Flammability	C fl-si*
Color Fastness to Water Rubbing	4
Color Fastness to Light	5
Installation	
Symbols	
CE EN 14041	
Emission	
	

*Fire rating Bfl-si is available upon request